



Data sheet
PHOTOLUMINESCENT
TILE

APPLICATION FIELD

Encapsulated photoluminescent tile. Its function, once the piece is loaded, is to signal and mark areas without lighting, such as bike lanes; tourist, archaeological and astronomical tourism routes; paths to practice running; walkways for pedestrians; itineraries in natural parks; viewpoints; stairs, sports courts, as well as in various port applications, among others.

PROPERTIES

- ❖ It is activated by sunlight or artificial light.
- ❖ Allows visibility in dark conditions or in poorly lit areas.
- ❖ It is resistant to aging caused by ultraviolet rays (suitable for exteriors).
- ❖ Very high shock resistance.
- ❖ Once the piece is charged, the luminescence lasts for more than 12 hours in dark conditions.

MODE OF USE



It is fixed to the surface by using a fixing resin.

MUST TAKE INTO ACCOUNT

In order for the luminescence effect to be appreciated, no light has to shine directly on the piece.

FORMATS AVAILABLE

- ❖ Circular: Ø 70 mm
- ❖ Square: 71x65 mm
- ❖ Arrow: 70x50 mm
- ❖ Rectangular: 70x40 mm

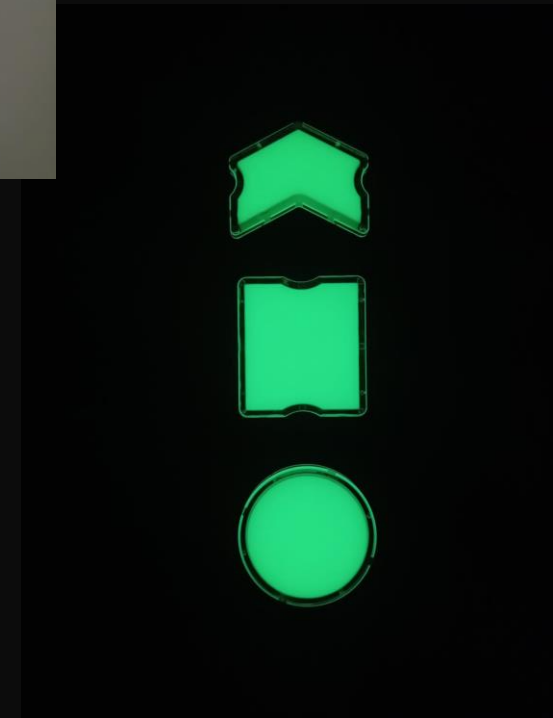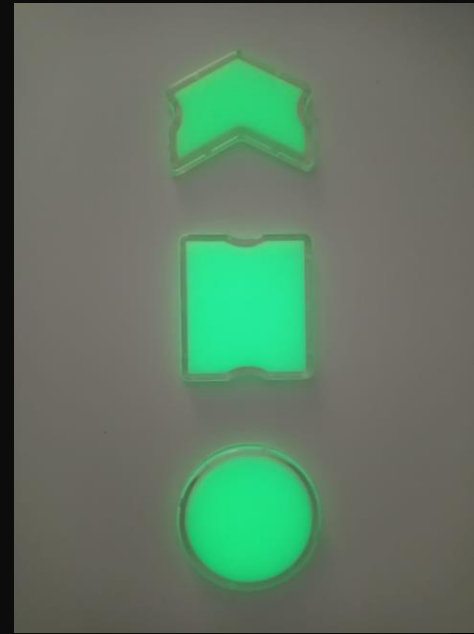

PROPERTIES OF THE PHOTOLUMINESCENT PIECE

Color glitter:	Green.
Operating temperature range	-15°C 50°C.
Luminance after 10 minutes	Greater than 1 300 mcd/m ²
Luminance after 60 minutes	Greater than 190 mcd/m ²
Dimming time UNE 23035 (*)	Greater than 26.600 minutos.
(*) Logarithmic extrapolation according to UNE 23035 until obtaining the time in which the luminance is 0,3 mcd/m²	
The technical data reflected is based on the technical knowledge obtained in external laboratories and by our technicians..	

HEAD OFFICE

C/ de la Travessia 15B, building Innsomnia,
46024, Valencia. Spain .
phon(+34) 656 71 69 84
info@abadecom.com – www.abadecom.com

Delegation Colombia

Cra. 19 N°. 166-52,
Bogotá, Colombia.

Delegation Panamá

Avenida: Sexta Norte, Edif. 10, planta
baja, Doleguita; Chiriquí, Panamá.

Delegation North

Pontevedra. Galicia. Spain

Delegation Costa Rica

Street 100 ave 23B # 25
Pavas, San José. Costa Rica

Delegation Portugal

Rua Prof. Henrique de Barros 4, Prior
Velho. Lisboa. Portugal

Delegation Paraguay

Street Chile number 980, Barrio
Catedral, Asunción, Paraguay.

This technical sheet, as well as all the recommendations and technical information, is only for the description of the characteristics of the product, form of use and its applications. The data and information contained therein are based on results obtained in external laboratories and on the knowledge of our technicians.

